



VAN STEEL

CORVETTE SUSPENSION SPECIALISTS

Wheel Sizes for Van Steel Offset Trailing Arms/Rear Coilovers

15" - 17" wheels must use a shortened spring, .5 - 1" per side.

The leaf spring will fit inside the wheel hoop of 18" and larger wheels.

Custom offset sway bar needed for 4.5" - 5" rear backspacing (63-79 only).

*Stock tire height is 27" tall. Some ideal tire sizes 15"-17" may no longer be available.
Check your tire supplier before ordering tires. Below are some known available tire sizes.*

C2 - 1963-1967

*Mid-year Corvettes can be a tight fit, we recommend checking fitment before ordering wheels.
Body may need to be reshimmed for max width rear wheels/tires.*

Front:

7" Rim / 4" Backspacing
225/55/17
225/50/18

Rear: 10" from fender to frame

8" Wheel / 5" Backspacing
8.5" Wheel / 5.5" Backspacing
9" Wheel / 6" Backspacing
255/50/17
255/45/18


C3 - 1968-1982

Front:

8" Rim / 4" Backspacing
255/50/17
255/45/18
255/40/19

Rear: 11" from fender to frame

15-20" x 9" Wheel / 5" Backspacing
18-20" x 10" Wheel / 5.5" Backspacing
285/40/18
285/35/19
285/30/20

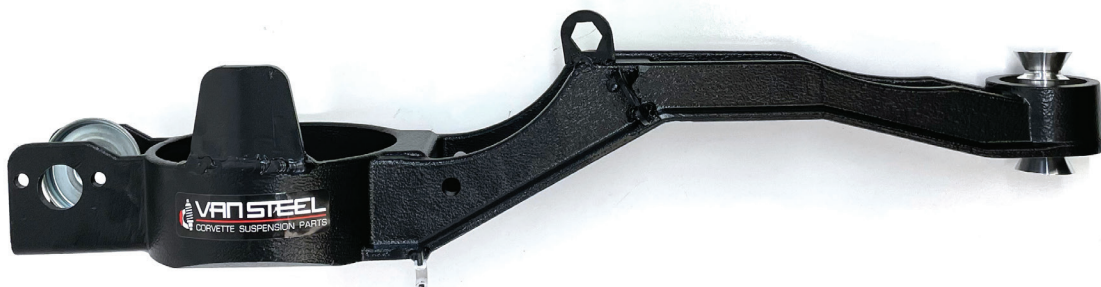

12285 West St. | Clearwater, FL 33762 | 800-418-5397 | vansteel.com
vettes@vansteel.com | updated 10/28/2020